


PHOTOELECTRIC SMOKE ALARM RF



Interconnect
up to 30 alarms
wirelessly

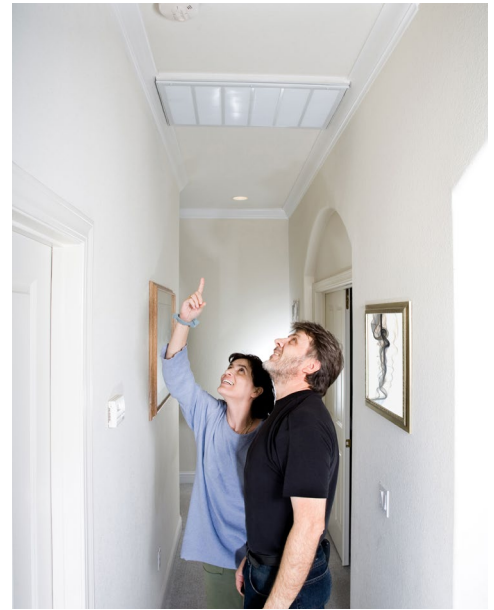

WIRELESS INTERCONNECTION (RF) (2 X 1.5V AA REPLACEABLE BATTERY BACK-UP)

The Emerald Planet (EP-RF-R1) Photoelectric Smoke Alarm is powered by 2 x 1.5V AA replaceable batteries.

This alarm can be stand-alone or can be connected (wireless RF) with up to 30 alarms. This allows all smoke alarms connected to activate simultaneously.

The alarm is fitted with a test/hush/silence button to facilitate testing of the alarm. The silence function allows the alarm system to be silenced in the case of a false alarm. Silencing one alarm will silence all connected alarms.

Designed to meet the rigorous new Australian smoke alarm standards (AS3786:2014).

FEATURES

- Powered by 2 x 1.5V replaceable AA batteries
- Batteries require replacement every 12 months
- RF interconnectable with up to 30 alarms on one wireless network
- Single point hush control when interconnected
- Rapid response to common domestic fire situations
- 5 year warranty
- CSIRO ActivFire listed
- High visibility LED indicator lights for test/hush/silence and fault warnings
- Loud alarm – 85dB(A) @ 3m
- Conforms to AS3786:2014

CHARACTERISTICS

MODEL NUMBER	EP-RF-R1
NORMAL OPERATING & STORAGE TEMPERATURE	0°C to 40°C
DIMENSIONS	118mm dia. 38mm deep
WEIGHT	190g
WARRANTY	5 Years

POWER	1yr, 2 x 1.5V replaceable AA batteries
SENSOR	Photoelectric optical chamber
ALARM VOLUME	>85dB(A) at 3m
INTERCONNECT	Wireless RF interconnection. Up to 30 units per network
NORMAL OPERATING & STORAGE HUMIDITY	15% to 95% relative humidity (non-condensing)
INCLUDES	Screws and mounting plate



sales@emeraldplanet.com.au

www.emeraldplanet.com.au